



DS-66M – DVI Multiplexer


DVI Multiplexer enables you to switch up several DVI sources from host computers in far locations, multiple digital displays using dedicated software. Like all DVI Link products, the DVI Multiplexer is built to be the most reliable device of its kind and offers a unique and affordable solution for pro and semi-pro installations where Digital switching is a must.



MAIN FEATURES

- A lot of Input and Output: 6 x 6 Channels
- High Resolution: Up to UXGA (1600*1200), HD Signal up to 1080p
- Various User Interface Using RS-232C, IR Remote Control and Front Keys
- DDC Function in All Channels
- Monitoring System of High Temperature Engine Rooms (by using optical cable)
- Evaluation of Display Quality in Display Industry
- General Monitoring Systems

CONNECTION FEATURES

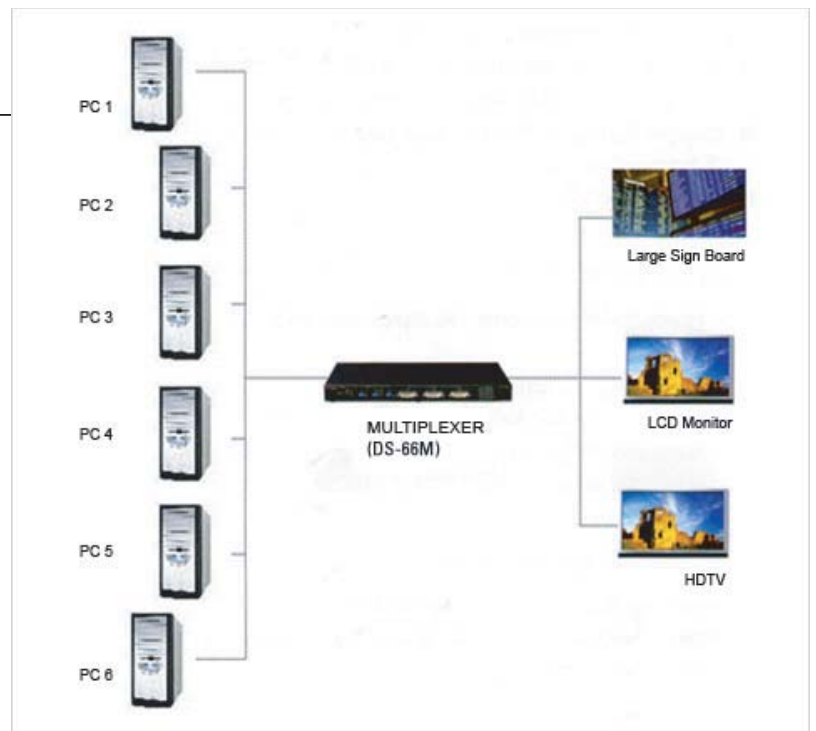

TECHNICAL SPECIFICATIONS

- Video Bandwidth : 25 – 165Mhz
- Input Channel : 6 Channel
- Output Channel : 6 Channel
- Signals & Connector Input & Output
DVI-I Connector DVI, Tx2+/Tx2-,
Tx1+/Tx1-, Tx0+/Tx0-, TxC+/TxC-
- DDC : All Channels
- Power Supply : DC 12V, 4.0A
- Power Consumption : 30W
- Operating Temperature & Humidity : 0-40°C, Less than 80% Humidity

DIMENSIONS (mm)

- DS-66M - 400mm*200mm*50mm (WxDxH)

WEIGHT (kg)

- DS-66M – 4 kg

2009-05

Ein Vertriebsprodukt von:

VIDELCO – Professionelle Audio-, Video-, Medien-Technik!

Telefon: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu


VIDELCO
Europe Limited