




VIS DVI EXTENDER Fibre Extension System

VIS DVI Extender Features

- Single link DVI video
- Supports DDC (look at the different variations)
- Small package
- Link status verifies optical connection
- Power indicator LED
- Transmitter power is parasitic to DVI interface
- Distance to 1000 meters

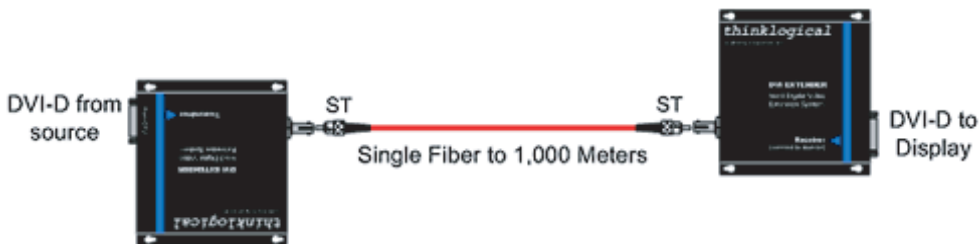

VIS DVI Extender Specifications

Supply Voltage	+ 5.0 V DC
Operating temperature	0°-40°C
Humidity	5-95%
Video Cable to Computer	2 meter DVI-D male-to-male (supplied)
Video Cable to Monitor	2 meter DVI-D male-to-male (supplied)
Connectors	Receiver: DVI-D female (1), ST fiber connector (1), 2.5mm power connector Transmitter: DVI-D female (1), ST fiber connector (1) 2.5mm power connector
DDC Protocol	Fully DDC2B compliant
Optical Cable	Single Fiber Multi-Mode 50 or 62.5 micron (available, not supplied)
Distance Range	Up to 1000 meters (3280 feet)
DC Adapter	AC/DC adapter universal input 90-264 VAC (supplied)
Physical Dimensions	Height: 1.125" (2.85cm) Width: 5.38" (13.66cm) Depth: 4.44" (11.28)
Power Consumption	3 watts per unit

VIS Variation:	Local Display Port	DDC (Display Data Channel)
VIS-3 dvi	no	yes
VIS-13 dvi	no	no
VIS-23 dvi	yes	no
VIS-30 dvi	yes	yes

Distributor / Vertrieb:

VIDELCO – Professionelle Audio- Video- Medien-Technik!
Tel.: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

