



## S2-105DVIA Specifications

### Video Inputs/Outputs

Inputs 5x DVI-D via DVI-I Connectors  
Output 1x DVI-D via DVI-I Connector

### Video Characteristics

Bandwidth 1.65GHz  
Pixel Rate 165 MHz  
Resolution (60Hz) 1920x1200 and 1080p

### Audio Inputs/Outputs

Inputs 5x 3.5mm Mini-Stereo Jacks  
Output 1x 3.5mm Mini-Stereo Jack

### Audio Characteristics

Analog Unbalanced  
Frequency Response 100KHz +/- 3dB

### Industry Compliance

HDCP Fully Compliant  
EDID Version 1.3 for Digital Formats  
HDMI Compatible w/DVI-HDMI Adapters

### Control

Standalone Operation Push Button, IR, RS-232  
From C2 Series Device via D-15 OPTION cable

### Mechanical

Size (H-W-D) 41.5x218x150mm(1.63"x8.6"x5.9")  
Weight (Net) 1.18kg (2.60 lbs)

### Warranty

Limited Warranty 2 Years Parts and Labor

### Environmental

Operating Temperature 0° to +50° C (+32° to +122° F)  
Operating Humidity 10% to 85%, Non-condensing  
Storage Temperature -10° to +70° C (+14° to +158° F)  
Storage Humidity 10% to 85%, Non-condensing

### Power Requirement

S2-105DVIA 12VDC@1A (Note 1)

### Regulatory Approvals

Expansion Units FCC, CE, RoHS  
Power Supplies UL, CUL, CE, PSE, GS, RoHS

### Product Item Numbers

S2-105DVIA Switcher 5x1 DVI-D & Stereo Audio

### Accessories Included

1x Operations Manual S2 Series  
1x Power Adapter US, UK or Euro  
1x OPTION Interconnect D-15M to D-15M & D-15F Cable

### Optional Accessories

RM-220 Single/Dual Rackmount Kit  
IRC-5 Infrared Remote Control

### Note

(1) The S2-105DVIA can not be powered S2 via the OPTIONS Cable from the C2 unit and must be powered with the separate power adapter that is included.

## S2-108HD Specifications

### Video Inputs/Outputs

Inputs 8x SDI (SD or HD-SDI) via BNC  
Serial Video 75 ohms  
Outputs 2x SDI (SD or HD-SDI) via BNC  
Serial Video 75 ohms

### Video Specifications

Max Output Level 800 mVpp/75 Ohms  
Jitter 0.2 UI (or better)  
Data Rate Up to 1.485 Gbps  
Automatically detected  
Output reclocked  
Non-compliant 259M and 292M  
Auto bypasses reclocker  
Loss of lock indication

### Industry Compliance

SMPTE 259M and 292M

### Control

Standalone Operation Push Button, IR, RS-232  
From C2 Series Device via D-15 OPTION cable

### Mechanical

Size (H-W-D) 41.5x218x150mm(1.63"x8.6"x5.9")  
Weight (Net) 1.18kg (2.60 lbs)

### Warranty

Limited Warranty 2 Years Parts and Labor

### Environmental

Operating Temperature 0° to +50° C (+32° to +122° F)  
Operating Humidity 10% to 85%, Non-condensing  
Storage Temperature -10° to +70° C (+14° to +158° F)  
Storage Humidity 10% to 85%, Non-condensing

### Power Requirement

S2-108HD 12VDC@ 300mA

### Regulatory Approvals

Expansion Units FCC, CE, RoHS  
Power Supplies UL, CUL, CE, PSE, GS, RoHS

### Product Item Number

S2-108HD Switcher 8x2 HD-SDI

### Accessories Included


1x Operations Manual S2 Series  
1x Power Adapter US, UK or Euro  
1x OPTION Interconnect D-15M to D-15M & D-15F Cable

### Optional Accessories

RM-220 Single/Dual Rackmount Kit  
IRC-5 Infrared Remote Control



S2-105DVIA

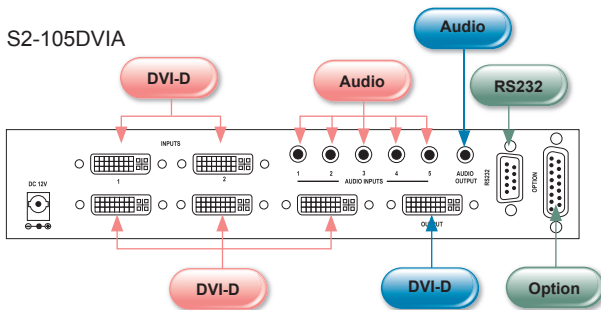

S2-108HD

