



## 1T-DA-472, 1T-DA-474 Specifications

### Video Input

Signal Type	RGBHV, RGBS, RGsB, YPbPr
Connector	1x HD-15 Female
R-G-B Level Range	0.5-2.0 Vp-p
Maximum Resolution	2560x1600

### Audio Input

Connector	1x 3.5mm Stereo Audio
Bandwidth/Level	20Hz-20KHz@0.5 to 1Vp-p

### Video Outputs

1T-DA-472	2x via HD-15 Female Connectors
1T-DA-474	4x via HD-15 Female Connectors

### Audio Outputs

1T-DA-472	2x via 3.5mm Audio Connectors
1T-DA-474	4x via 3.5mm Audio Connectors

### General

R-G-B Bandwidth	500+MHz
Maximum Distance	Up to 300' from amplifier (Note 1)
DDC Capability	DDC1, DDC2, DDC2B (Port 1)

### Mechanical

Size (H-W-D)	44x160x58mm (1.7"x6.3"x2.3")
Weight (Net)	400g (0.88 lbs)

### Warranty

Limited Warranty	2 Years Parts and Labor
------------------	-------------------------

### Environmental

Operating Temperature	0° to +50°C (+32° to +122°F)
Operating Humidity	10% to 90%, Non-condensing
Storage Temperature	-10° to +60° C (+14° to +140° F)
Storage Humidity	10% to 90%, Non-condensing

### Power Requirement

External Power Supply	5VDC@2A - Locking Plug
-----------------------	------------------------

### Regulatory Approvals

Amplifier Units	FCC, CE, RoHS
Power Supplies	UL, CUL, CE, PSE, GS, RoHS

### Accessories Included

1x AC Power Adapter	US, UK or Euro
1x Operations Manual	

### Product Item Numbers

1T-DA-472	2-Output Version
1T-DA-474	4-Output Version

### Optional Accessories

RM-320S	Rackmount kit for one unit
RM-320D	Rackmount kit for two units

### Notes

(1) To achieve the max rated distance, use premium cables.

## 1T-DA-462 Specifications

### Video Input

Signal Type	RGBHV, RGBS, RGsB, YPbPr
Connector	1x HD-15 Female
R-G-B Level Range	0.5-2.0 Vp-p
Maximum Resolution	2560x1600

### Audio Input

Connector	1x 3.5mm Stereo Audio
Bandwidth/Level	20Hz-30KHz@0.5 to 1Vp-p

### Video Output

Connector	2x via HD-15 Female Connectors
-----------	--------------------------------

### Audio Output

Connector	2x 3.5mm Stereo Audio
-----------	-----------------------

### General

R-G-B Bandwidth	450+MHz
Maximum Distance	Up to 300' from amplifier (Note 1)
DDC Capability	DDC1, DDC2, DDC2B (Port 1)

### Mechanical

Size (H-W-D)	23x86x86mm (0.9"x3.5"x3.5")
Weight (Net)	90 g (0.21 lbs)

### Warranty

Limited Warranty	2 Years Parts and Labor
------------------	-------------------------

### Environmental

Operating Temperature	0° to +48° C (+32° to +120° F)
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70° C (+14° to +158° F)
Storage Humidity	10% to 85%, Non-condensing

### Power Requirement

External Power Supply	5VDC@2A - Locking Plug
-----------------------	------------------------

### Regulatory Approvals

Amplifier Units	FCC, CE, RoHS
Power Supplies	UL, CUL, CE, PSE, GS, RoHS

### Accessories Included

1x Power Adapter	US, UK or Euro
1x USB Power Cable	
1x Operations Manual	

### Product Item Number


1T-DA-462

### Notes


(1) To achieve the max rated distance, use premium cables.



1T-DA-472

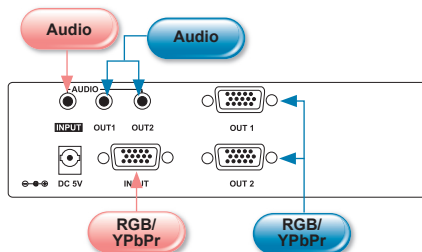

1T-DA-474

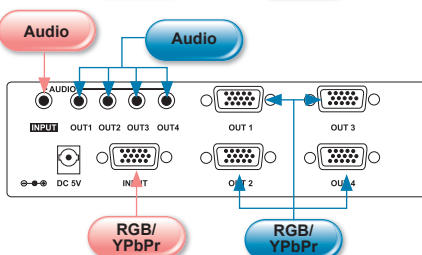

1T-DA-462

