



# LM-563R, LM-404R Specifications

## Video Inputs – Per Display

Composite Video 1x via BNC Connector  
 YC (S-Video) 1x via 4-Pin Mini-DIN Connector

## Controls – Per Display

Mirror Image Switch Right to Left Reverse  
 Video Adjustments Brightness, Contrast, Color  
 Source Selection Composite or S-Video Input  
 Power On/Off Switch

## General

Aspect Ratio 4:3  
 Display Element Active Matrix TFT  
 TV Standards NTSC - PAL Auto-detect  
 Vertical Frequency NTSC:60Hz, PAL:50Hz  
 Horizontal Frequency NTSC:15.75KHz, PAL:15.625KHz

## Limited Warranty

Unit, except LCD Panel 1 Year Parts and Labor  
 LCD Panel Panel Manufacturer's Terms

## Mechanical

Size (H-W-D) 133x482x76mm (5.25"x19"x3")  
 Weight (Net) 2 kg (4.4 lbs)  
 Rackmount Type 3 RU - Tilt Up/Down

## Environmental

Operating Temperature 0° to +48° C (+32° to +120° F)  
 Operating Humidity 10% to 85%, Non-condensing  
 Storage Temperature -10° to +70° C (+14° to +158° F)  
 Storage Humidity 10% to 85%, Non-condensing

## Power Requirement

External Power Supply 12VDC@1A - Locking DC  
 (Common PS for all Displays)

## Regulatory Approvals

Monitors FCC, CE, RoHS  
 Power Supplies UL, CUL, CE, PSE, GS, RoHS

## Accessories Included


1x Operations Manual  
 4x Rackmount Screws  
 1x Set Rackmount Ears Tiltable Configuration  
 1x Power Adapter US, UK or Euro  
 1x PS Mounting Bracket Power Adapter to Back of Unit

## Product Item Numbers

LM-563R Triple 5.6" Rackmount Monitor  
 LM-404R Quad 4.0" Rackmount Monitor



LM-563R

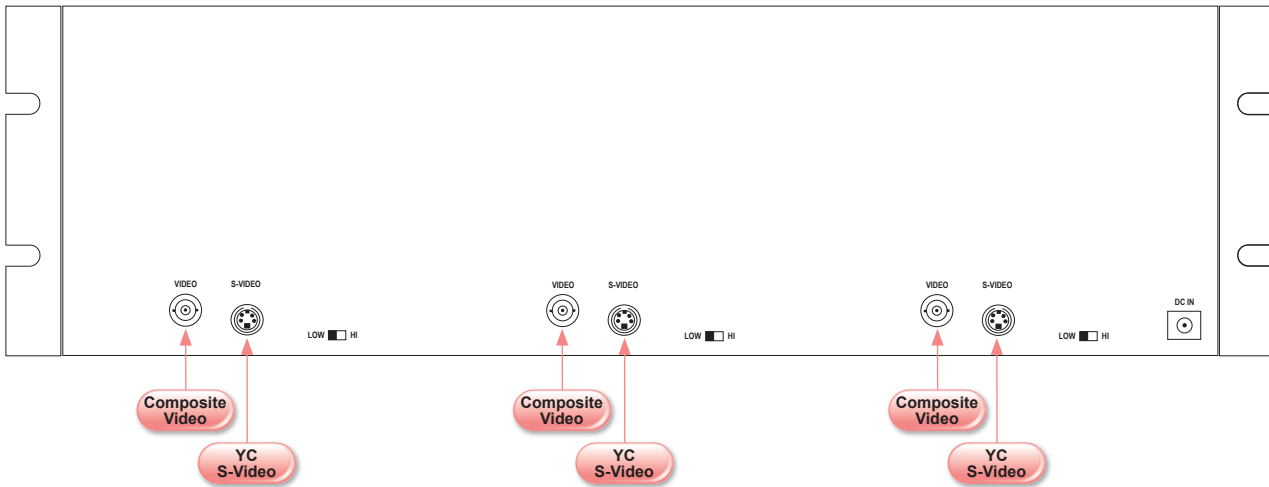

LM-404R

