

LM-404HD

Quad 4" HD Universal LCD Monitor



Key Features LM-404HD

- Inputs: SD/HD-SDI, RGBHV, YPbPr, CV & YC
- Resolutions up to 800x480, 1080p
- High Brightness, Pro Grade LCD Panels
- 16.7 Million Colors
- 400:1 Contrast Ratio
- Triple Tally LED's
- 130° Left/Right and 110° Up/Down View Angles
- Vertically Tiltable Rackmount Housing
- Locking External DC Power Supply
- Inputs: SD/HD-SDI, RGBHV, YPbPr, CV & YC
- Resolutions up to 1024x768, 1080p
- High Brightness, Pro Grade LCD Panels
- 16.7 Million Colors
- 600:1 Contrast Ratio
- Triple Tally LED's
- 170° Left/Right and 170° Up/Down View Angles
- Vertically Tiltable Rackmount Housing
- Locking External DC Power Supply

LM-404HD is a high performance Multi-format, Quad Color LCD Monitor for the broadcast and professional market. A multitude of video signal formats may be accurately monitored. The high brightness, wide viewing angle, excellent contrast ratio and high definition color result in an outstanding image. The unit features inputs for SDI (either SD or HD) with an active output, Analog RGBHV, YPbPr Component Video, a Composite Video and a YC input. NTSC and PAL Television Standards are supported and automatically detected.

Front panel Tally LEDs can be activated external via the DB9 connector. The Menu contains all the necessary controls to adjust Contrast, Brightness, Sharpness, Color Level (R-G-B), and other parameters necessary for optimum monitor performance. Results of these adjustments can be viewed via the On Screen Display. A rack mount kit is included that can tilt up or down. Although the monitor has excellent viewing angles, the tilt feature can be beneficial when circumstances necessitate mounting the monitor considerably above or below normal eye level.

LCD Monitors

Distributor / Vertrieb:

VIDELCO – Professionelle Audio- Video- Medien-Technik!
Tel.: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu

LM-404HD Specifications

LCD Panel

Display Size	4.3" (109.2mm) (Diagonal)
Display Area	3.66"x 2.22" (93 x 55.8mm)
Panel Resolution	800x480 (16x9)
Dot Pitch	0.116mm
Color Resolution	16.7 Million Colors
Contrast Ratio	400:1
Brightness	200 cd/m2
Response Time	20 msec
Left/Right View Angle	130°
Up/Down View Angle	110°
Aspect Ratio	16:9

Video Inputs

SD/HD-SDI	1x via BNC with Active Output
Analog RGBHV	1x via HD-15 Female
Composite Video	1x via BNC Connectors
YC (S-Video)	1x via 4-Pin Mini-DIN Connector
YPbPr Component	1x via 3 BNC Connectors

SD/HD-SDI Inputs

SDTV Bit Rate	270Mbps, 525i (60/59.94), 625i (50)
HDTV Bit Rate	1.485, 1.4835Gbps
HDTV Resolutions	1080P/30Hz, 1080P/29.97Hz, 1080P/25Hz, 1080P/24Hz, 1080P/23.98Hz, 1080i/60Hz, 1080i/59.94Hz, 1080i/50Hz, 1035i/60Hz, 1035i/59.94Hz, 720P/60Hz, 720P/59.94Hz, 720P/50Hz

Analog Inputs

SDTV (CV, Y/C)	1V pp CVBS, 0.8Vpp Y/C
HDTV - YPbPr	480p, 576p, 720p, 1080i, 1080p

Analog RGBHV Inputs

640x350	70, 85Hz
720x350	70, 85Hz
640x400	56, 70, 85Hz
720x400	70, 85Hz
640x480	60, 66, 72, 75, 85Hz
800x600	56, 60, 70, 72, 75, 85Hz
1024x768	60, 70, 72, 75, 85Hz

CV/S-Video Inputs

Vert. Frequency	NTSC 60Hz, PAL 50Hz
Horiz. Frequency	NTSC 15.75KHz, PAL 15.625KHz

Tally Control

Tally Input	1x via DB9 Connector
-------------	----------------------

General

Display Element	Active Matrix TFT
Video Adjustments	Brightness, Contrast, Sharpness, Color
TV Standards	NTSC/ PAL Auto-detect
Aspect Ratio Modes	16:9, 4:3

Front Panel Controls

Menu Navigation	Menu, Left, Right
Input Select	SDI, YPbPr, CV, SV, PC (RGBHV)
Power	On/Off

Limited Warranty

Unit, except LCD	1 Year Parts and Labor
LCD Panel	Panel Manufacturer's Terms

Mechanical

Size (H-W-D)	132.0x483.5x150mm(5.2"x19"x5.9")
Weight (Net)	5.5 kg (12.1 lbs)
Rackmount	3RU - Tilt Up/Down

Environmental

Operating Temperature	-10° to +50° C (+14° to +122° F)
Operating Humidity	10% to 90%, Non-condensing
Storage Temperature	-10° to +60° C (-14° to +140° F)
Storage Humidity	10% to 90%, Non-condensing

Power Requirement

External Power Supply	12 VDC@4A
-----------------------	-----------

Regulatory Approvals

Monitors	FCC, CE, RoHS
Power Supplies	UL, CUL, CE, PSE, GS, RoHS

Accessories Included


1x Power Adaptor	US, UK or Euro
------------------	----------------

Product Item Number

1x Operations Manual	Tiltable Configuration
4x Rackmount Screws	Quad LCD Monitor
1x Set Rackmount Ears	
LM-404HD	



LM-404HD

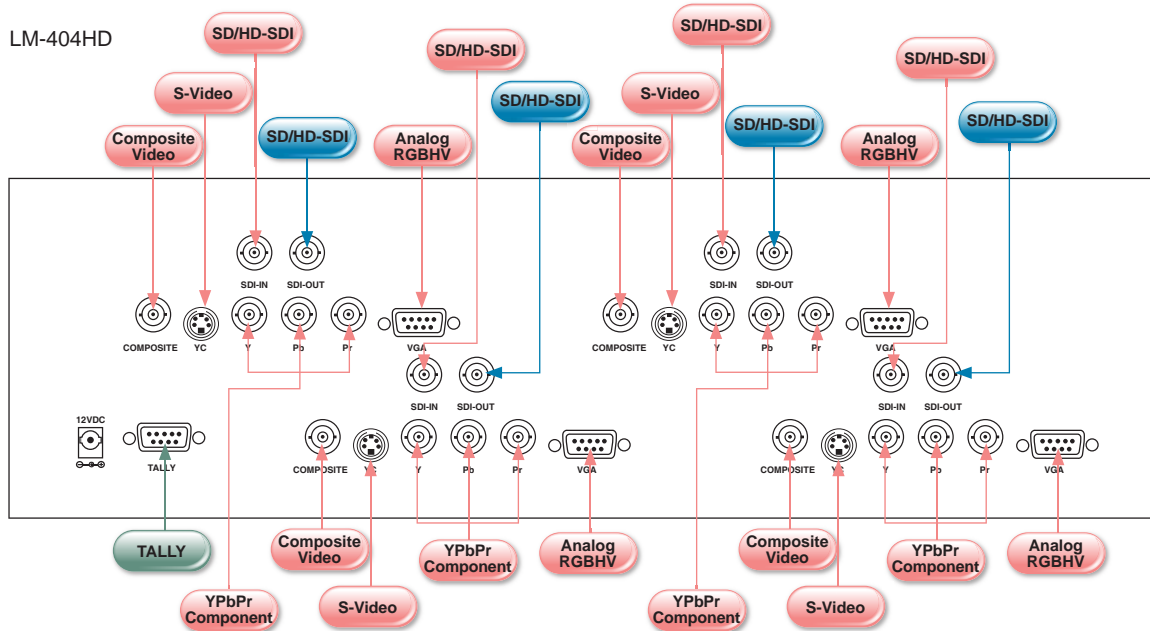

Distributor / Vertrieb:

VIDELCO – Professionelle Audio- Video- Medien-Technik!

Tel.: +49 (0)2102 / 86 39-00 • Fax: +49 (0)2102 / 86 39-17 • info@videlco.eu • www.videlco.eu