

VD-262HC

HDMI to PC/HD Format Converter with Audio



The VD-262HC converts digital HDMI to analog PC/RGB or HD YPbPr with audio. It enables you to connect your new HDMI sources to the older analog PC monitor, projector or TC

Specifications:

- HDMI is compliant with HDMI 1.0
- PC Output: HD-15 (RGBHV / YPbPr)
- Analog Audio Output: Analog L.R stereo
- Operation frequency: up to 165MHz
- Input/Output resolution:


PC: VGA@60, VGA@72, VGA@75, VGA@85
SVGA@60, SVGA@72, SVGA@75, SVGA@85
XGA@60, XGA@70, XGA@75, XGA@85, XGA@87
SXGA@60, SXGA@75, SXGA@85, UXGA@60
1152@70, 1152@75, 1152@85

HD: 480i@60, 576i@50, 480P@60, 576P@50, 720P@60, 720P@50,
1080i@60, 1080i@50, 1080P@60, 1080P@50, 1080P@30, 1080P@25, 1080P@24

- Using switch to select output format between RGB and YPbPr
- Dimensions (WxHxD): 76 * 30 * 105mm
- Power: 5V Center-positive



Operation Controls and Functions:

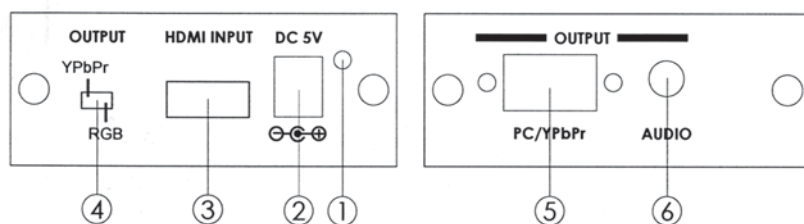

1. Power LED.
2. DC 5V power input jack.
3. HDMI input connector: Connects to HDMI output connector of your HDMI source equipment.
4. Output format switch:
 - Set the switch to YPbPr when the output of VD-262HC is connected to your display TV through 3 RCA component input.(Using VGA to 3 RCA adaptor cable)
 - Set the switch to RGB when the output of VD-262HC is connected to your display TV through HD-15 D-sub PC input.
5. HD-15 D-sub output : Connects to the input of your display TV through VGA cable, or D-sub to 3 RCA adaptor cable.
6. Stereo audio output via 3.5mm phone jack.

Vertrieb:

VIDELCO – Professionelle Audio-, Video-, Medien-Technik!
Telefon: 02102 / 86 39-00 • Fax: 02102 / 86 39-17 • info@videlco.eu • www.videlco.eu

