

LM-1911R, LM-1511R Specifications

LCD Panel

	LM-1911R	LM-1511R
Display Size - Diagonal	19" (48.2cm)	15" (38.1cm)
Panel Resolution	1280x1024	1024x768
Contrast Ratio	500:1	450:1
Brightness	250 cd/m2	330 cd/m2
Left/Right View Angle	160°	130°
Up/Down View Angle	160°	100°
Aspect Ratio	5:4	4:3

PC Input Range

	SXGA (LM-1911R)	XGA (LM-1511R)
Maximum Resolution	1280x1024	1024x768
Vertical Freq Range	60~75Hz	56~75Hz
Horizontal Freq Range	31.5-80KHz	31.5-80KHz

Inputs

Composite Video	2x via Looping BNC Connectors
YC (S-Video)	1x via 4-Pin Mini-DIN Connector
Stereo Audio	2x via 2 RCA Connectors (R/L)
Computer	1x via HD-15 Female
Computer Stereo Audio	1x via 3.5mm Mini-Stereo Jack

Video Input Range

	NTSC	PAL
Vertical Frequency	60Hz	50Hz
Horizontal Frequency	15.75KHz	15.625KHz

General

Display Element	Active Matrix TFT
Video Adjustments	Brightness, Contrast, Color, Hue
Speakers	Internal – Right & Left Channel
TV Standards	NTSC/ PAL/SECAM Auto-detect

Front Panel Controls

Left, Right Buttons	Menu Navigation and Control
Audio Volume	Increase/Decrease (Note 1)
Source Select Button	Toggle thru inputs
Power Button	On/Off Switch

Limited Warranty

Unit, except LCD Panel	1 Year Parts and Labor
LCD Panel	Panel Manufacturer's Terms

Mechanical – In Rackmount

LM-1911R Size (H-W-D)	400x482x65mm (15.75"x19"x2.5")
Weight (Net)	6.5 kg (14.2 lbs)
Rackmount	9RU - Tilt Up/Down
LM-1511R Size (H-W-D)	355x482x59mm (14"x19"x2.3")
Weight (Net)	5.3 kg (11.6 lbs)
Rackmount	8 RU - Tilt Up/Down

Mechanical – Without Rackmount

LM-1911R Size (H-W-D)	424x404x65mm(15.7"x16.7"x2.5")
Weight (Net)	6.6 kg (13.6 lbs)
Wall Mount	VESA Standard
LM-1511R Size (H-W-D)	284x380x59mm(11.2"x14.9"x2.3")
Weight (Net)	4.9 kg (10.8 lbs)
Wall Mount	VESA Standard

Environmental

Operating Temperature	-10° to +60° C (+14° to +140° F)
Operating Humidity	20% to 80%, Non-condensing
Storage Temperature	-20° to +70° C (-4° to +158° F)
Storage Humidity	20% to 80%, Non-condensing

Power Requirement

Internal Power Supply	86-256 Volts AC, 50-60Hz
-----------------------	--------------------------

Regulatory Approvals

Monitors	FCC, CE, RoHS
Power Supplies	UL, CUL, CE, PSE, GS, RoHS

Accessories Included


1x Operations Manual	
4x Rackmount Screws	
1x Set Rackmount Ears	Tilttable Configuration

Product Item Numbers

LM-1901R	19" Rackmount Monitor
LM-1501R	15" Rackmount Monitor

Notes

(1) When not in the Menu Mode, the L/R Buttons are used.

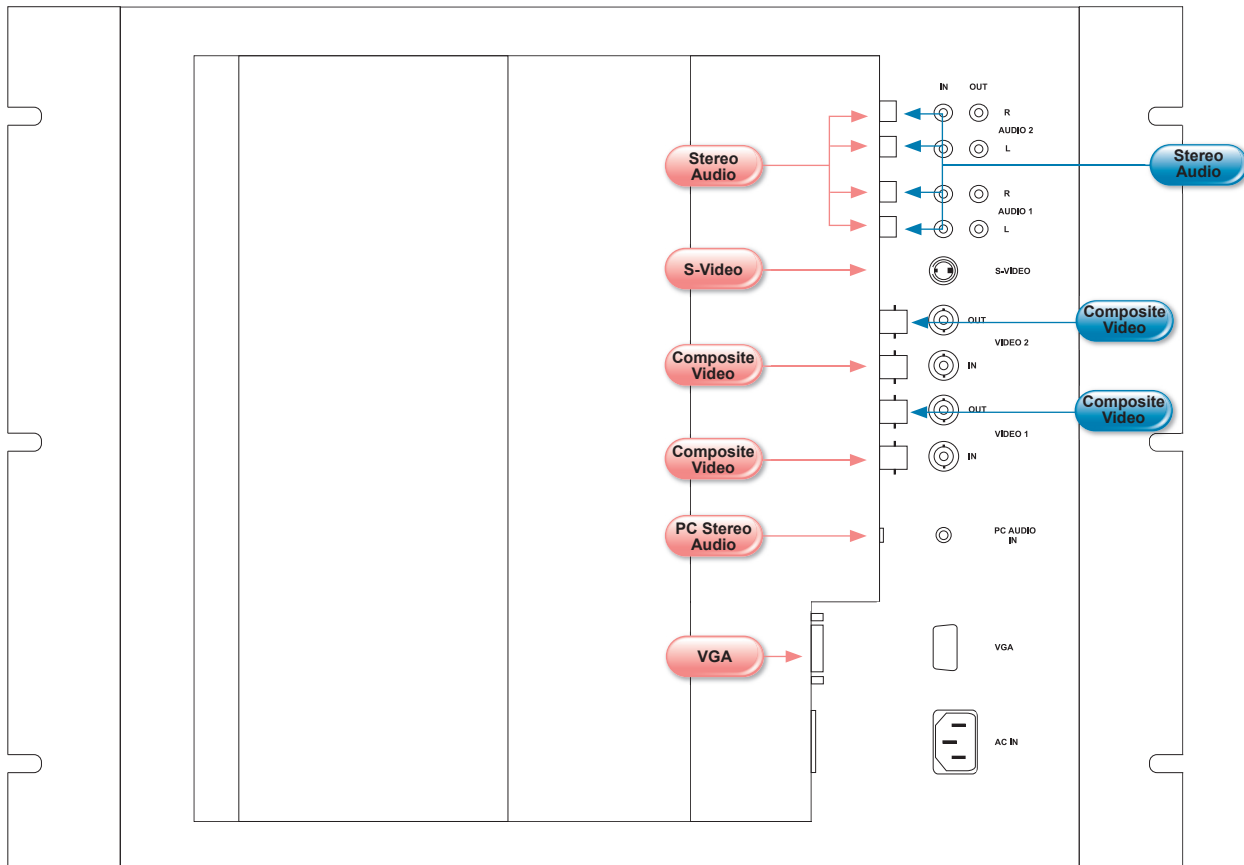

LM-1511R Panel illustrated - LM-1911R has same I/O configuration